

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/089159 A1(51) International Patent Classification⁷: **A47B 47/00**(21) International Application Number:
PCT/KR2004/000867


(22) International Filing Date: 14 April 2004 (14.04.2004)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2003-0023502 14 April 2003 (14.04.2003) KR
10-2004-0025202 13 April 2004 (13.04.2004) KR(71) Applicant and
(72) Inventor: **CHOI, Cheon Soon** [KR/KR]; 102-103 Hanmi
Keumgang Apt., Buyun-ri, Daeso-myeon, Eumseong-gun,
Chungcheongbuk-do 369-823 (KR).(74) Agent: **CHOI, Jong Won**; 5th Fl. Shinwon Bldg., 648-15
Yeoksam-dong, Gangnam-gu, Seoul 135-911 (KR).(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).**Published:**
— with international search report*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: PREFABRICATING RACK FRAME

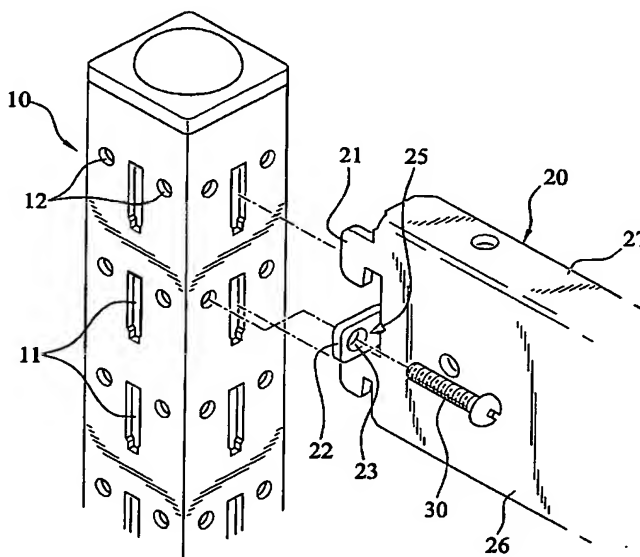

(57) Abstract: The prefabricating rack frame are comprised of a column and a cross member. The column have plural slots along a longitudinal direction at an even interval, and the cross member have a pair of hooks to be inserted into respective slot, and a location restrictor is formed between the upper and the lower hook and bent rectangular to the hook, and tightly contracted on the outer surface of the column. The cross member further has a pit and a reinforcement rib; the pit is formed at the outer corner where each longitudinal end of the cross member meets the foot of the location restrictor; and a reinforcement rib is provided at the inner corner of the location restrictor and its configuration counterposes to that of the pit.